

## Lawnscape 175



### APPLICATION


This is an excellent landscape product that offers thatch, which provides added body, reducing the amount of in fill needed. The four color blend of this surface provides a truly authentic look and feel that resembles a natural lawn. This product can be used for landscapes, pet areas, fringes, and much more. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.

PROPERTY	DESCRIPTION
<b>Primary/Stalk Yarn Polymer</b>	Polyethylene
<b>Secondary/Thatch Yarn Polymer</b>	Polyethylene
<b>Yarn Cross Section</b>	Polyethylene Slit Film/Texturized Polypropylene
<b>Standard Colors</b>	Field/Olive with Field/Jute Thatch
<b>Coating Type(s)</b>	SilverBack™ Polyurethane
<b>Perforations</b>	Yes
<b>Pile Height</b>	1¾"
<b>Total Fabric Weight</b>	95 oz/yd <sup>2</sup>
<b>Fabric Width</b>	15 ft.




# Lawnscape 175

FINISHED FABRIC	ENGLISH SYSTEM		METRIC SYSTEM		ASTM TEST F-1551
Nominal Specification	Value	Units	Value	Units	Method
Pile Height (Nominal)	1.75	In.	44.45	mm.	D-5823
Face Weight	68	oz/yd <sup>2</sup>	2305.2	g/m <sup>2</sup>	D-5848
Total Fabric Weight	95	oz/yd <sup>2</sup>	3221	g/m <sup>2</sup>	D-5848
Primary backing Weight	7.4	oz/yd <sup>2</sup>	251	g/m <sup>2</sup>	D-5848
Secondary Coating Weight	20	oz/yd <sup>2</sup>	678	g/m <sup>2</sup>	D-5848
Tuft Bind	>8	lbs.	>3.6	Kg.	D-1335
Grab Tear Strength (Average)	>200	lbs.	>91	Kg.	D-5034
Lead Content	<50	ppm	<50	ppm	F-2765
Total Yarn Linear Density	14,900	Denier	16,553.9	D-Tex	D-1577
Tensile Strength	8.0	lbs.	3.63	Kg.	D-5034
Stitch Rate	8	Per 3"	10.48	Per 10 cm	D-5793
Machine Gauge	0.375	In.	.96	Cm.	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Water Permeability w/infill	>30	In./Hr.	>76	Cm./Hr.	F-1551
Fiber Thickness	22	mils	235	microns	D-3218
Fabric Width	15	Ft.	4.6	M	None

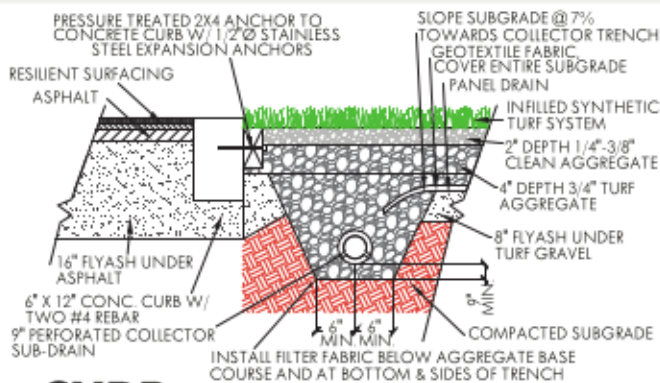

**CURB**

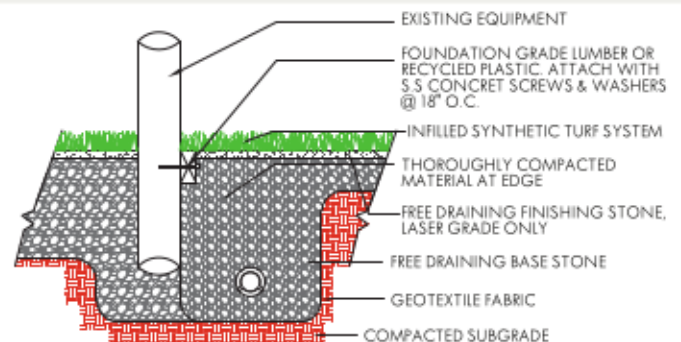

**EQUIPMENT**